

make a grand entrance

POLLARDOR ENTRANCE SYSTEMS

High Performance Thermal Doors in Steel and Fiberglass







CHOOSE POLLARDOR

HIGH PERFORMANCE THERMAL DOORS



First impressions are incredibly important. That's why at Pollard we don't just make great windows, we also make beautiful doors and entrance systems. Our Pollardor Insulated Entrance Systems are manufactured with insulated steel or fiberglass doors and offer durability and security. Whether you choose a paintable wood or low maintenance vinyl frame, there is a design to meet your needs. Select from a wide variety of decorative lites with both matching sidelites and transoms. Increase the energy efficiency and enhance the curb appeal of your home with a Pollardor Insulated Entrance System.

Solid Wood Frame

The insulating properties of wood will add warmth to your home. All wood components are pressure-treated to protect against decay. Also, all frame joints are sealed to resist water penetration and are paint-ready to match your exterior finishes.



Tough Steel Door Skin

Durable 24 gauge steel skin resists warping, swelling or twisting like conventional wood doors. Hot-dipped galvanized steel assures long term protection and an excellent base for finishing.

Vinyl Clad Frame

Our doors can be purchased with a tough 0.065" thick, vinyl clad low maintenance frame. It withstands all types of weather without peeling, flaking, pitting or corroding. Available in Pearl White, Silversand or Autumn Ivory colors. To give it a more traditional look optional brickmold can be purchased.

Weatherstripping

The closed cell weatherstripping used on the Polardor sill resists the absorption of water so that in cold winter months it does not freeze and lose its tight seal. On the remainder of the door frame, a foam compression weatherstrip is used to provide an optimal, secure seal around the perimeter of the door which in winter keeps warm air in and keeps cold air out.

Aluminum Sill

Constructed of durable 1/16" aluminum and features raised ribs which allow for good traction. Low profile sill available for greater accessibility. Available in black or standard mill finish.

Water Trap Sill Design

Driving rain is trapped in this unique, fiberglass channel and released to the outside through the weep hole. A weep hole cover helps prevent insects from entering below the sill.



Solid Wood Lock Block

Each door is equipped with a solid wood lock block to ensure permanent attachment of security hardware.

Fiberglass Door Skin

Durable and easy to finish. Available in both smooth skin for painting and wood-grain texture for staining. Dent and warp resistant.

Polyurethane Foam Core

The insulation value is at least six times greater than a solid wood door. With an R value of 12 it is the perfect solution for your home.

Sweepless Door


By eliminating the need for a door sweep there is no sweep to tear or adjust.

Fiberglass Subsill

The durable 3/32" fiberglass subsill resists rotting and cracking. The continuous sill running under the jambs prevents jamb rot.

CHOOSE FROM A LARGE SELECTION OF DOOR STYLES

Door Slab Designs – Smooth Steel, Smooth Fiberglass or Textured Fiberglass

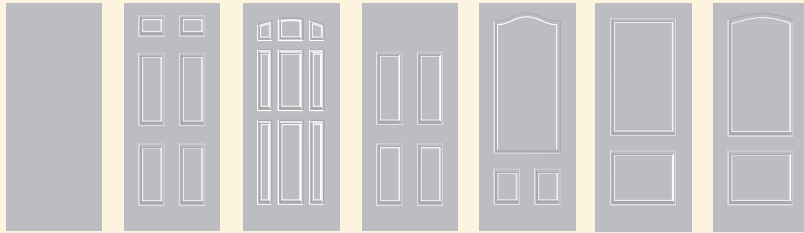

A B D** E G H J**


A, B and H door slabs are available in an 8 foot height in both smooth steel, smooth fiberglass and fiberglass wood grain finish. E door slabs are used only with door lites.)



A-01 B-01 SL-01 A-02 B-02 SL-02 A-03 B-03 A-06 B-06 A-07



B-07 B-08 A-13* SL-13* A-14* SL-14* A-15* A-16* A-19 A-20

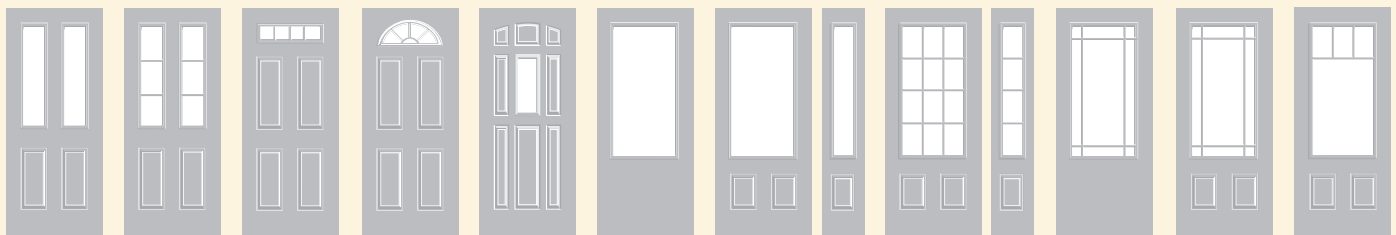

B-27 B-28 E-29 E-30 D-31** A-32* G-32* SL-32* G-33* SL-33* A-34* G-34* G-37



SL-1080* SL-1080-F SL-1480* SL-1480-F B-35 SL-35 A-36 SL-36

When ordering doors:

Hinging of door is always determined from outside.



HINGE LEFT



HINGE RIGHT

*Available in 8 Foot Height
** Not available in fiberglass

DOOR AND SIDELITE SIZING



Liberty Doors with Advantage or Liberty Sidelites

32" DOOR							
RSO	34 ¹¹ / ₁₆	44 ⁷ / ₃₂	48 ⁵ / ₃₂	51 ¹ / ₂	53 ³ / ₄	61 ⁵ / ₈	68 ⁵ / ₁₆
OSM	33 ¹⁵ / ₁₆	43 ¹⁵ / ₃₂	47 ¹³ / ₃₂	50 ³ / ₄	53	60 ⁷ / ₈	67 ⁹ / ₁₆
8ft. High	Standard						
	8ft. High	Single	+LSL/ASL1080	+LSL/ASL1480	+LSL/ASL1680	+2 LSL/ASL1080	+2 LSL/ASL1480
8ft. High	Standard						
	8ft. High	Single	+LSL/ASL1096	+LSL/ASL1496	+LSL/ASL1696*	+2 LSL/ASL1096	+2 LSL/ASL1496

34" DOOR							
RSO	36 ¹¹ / ₁₆	46 ⁷ / ₃₂	50 ⁵ / ₃₂	53 ¹ / ₂	55 ³ / ₄	63 ⁵ / ₈	70 ⁵ / ₁₆
OSM	35 ¹⁵ / ₁₆	45 ¹⁵ / ₃₂	49 ¹³ / ₃₂	52 ³ / ₄	55	62 ⁷ / ₈	69 ⁹ / ₁₆
Standard	Single	+LSL/ASL1080	+LSL/ASL1480	+LSL/ASL1680	+2 LSL/ASL1080	+2 LSL/ASL1480	+2 LSL/ASL1680
8ft. High	Single	+LSL/ASL1096	+LSL/ASL1496	+LSL/ASL1696*	+2 LSL/ASL1096	+2 LSL/ASL1496	+2 LSL/ASL1696*

36" DOOR							
RSO	38 ¹¹ / ₁₆	48 ⁷ / ₃₂	52 ⁵ / ₃₂	55 ¹ / ₂	57 ³ / ₄	65 ⁵ / ₈	72 ⁵ / ₁₆
OSM	37 ¹⁵ / ₁₆	47 ¹⁵ / ₃₂	51 ¹³ / ₃₂	54 ³ / ₄	57	64 ⁷ / ₈	71 ⁹ / ₁₆
Standard	Single	+LSL/ASL1080	+LSL/ASL1480	+LSL/ASL1680	+2 LSL/ASL1080	+2 LSL/ASL1480	+2 LSL/ASL1680
8ft. High	Single	+LSL/ASL1096	+LSL/ASL1496	+LSL/ASL1696*	+2 LSL/ASL1096	+2 LSL/ASL1496	+2 LSL/ASL1696*

42" DOOR							
RSO	44 ¹¹ / ₁₆	54 ⁷ / ₃₂	58 ⁵ / ₃₂	61 ¹ / ₂	63 ³ / ₄	71 ⁵ / ₈	78 ⁵ / ₁₆
OSM	43 ¹⁵ / ₁₆	53 ¹⁵ / ₃₂	57 ¹³ / ₃₂	60 ³ / ₄	63	70 ⁷ / ₈	77 ⁹ / ₁₆
Standard	Single	+LSL/ASL1080	+LSL/ASL1480	+LSL/ASL1680	+2 LSL/ASL1080	+2 LSL/ASL1480	+2 LSL/ASL1680
8ft. High	Single	+LSL/ASL1096	+LSL/ASL1496	+LSL/ASL1696*	+2 LSL/ASL1096	+2 LSL/ASL1496	+2 LSL/ASL1696*

Liberty Double Doors/Terrace Doors with Advantage or Liberty Sidelites

32" DOOR				
RSO	67 ⁵ / ₈	86 ¹¹ / ₁₆	94 ⁹ / ₁₆	101 ¹ / ₄
OSM	66 ⁷ / ₈	85 ¹⁵ / ₁₆	93 ¹³ / ₁₆	100 ¹ / ₂
8ft. High	Standard			
	8ft. High	Double/Terrace	+2 ASL 1080	+2 ASL 1480
8ft. High	Standard			
	8ft. High	Double/Terrace	+2 ASL 1096	+2 ASL 1496 *

34" DOOR				
RSO	71 ⁵ / ₈	90 ¹¹ / ₁₆	98 ⁹ / ₁₆	105 ¹ / ₄
OSM	70 ⁷ / ₈	89 ¹⁵ / ₁₆	97 ¹³ / ₁₆	104 ¹ / ₂
Standard	Double/Terrace	+2 ASL 1080	+2 ASL 1480	+2 ASL 1680
8ft. High	Double/Terrace	+2 ASL 1096	+2 ASL 1496	+2 ASL 1696 *

36" DOOR				
RSO	75 ⁵ / ₈	94 ¹¹ / ₁₆	102 ⁹ / ₁₆	109 ¹ / ₄
OSM	74 ⁷ / ₈	93 ¹⁵ / ₁₆	101 ¹³ / ₁₆	108 ¹ / ₂
Standard	Double/Terrace	+2 ASL 1080	+2 ASL 1480	+2 ASL 1680
8ft. High	Double/Terrace	+2 ASL 1096	+2 ASL 1496	+2 ASL 1696 *

Leaded transoms can be custom ordered to match your door and sidelites. Ask your Pollard Windows Sales Representative for more information.

Ultraprime Doors with Sidelites

32" DOOR							
RSO	34 ¹ / ₁₆	42 ¹⁵ / ₁₆	46 ¹⁵ / ₁₆	49 ³ / ₃₂	51 ¹³ / ₁₆	59 ¹³ / ₁₆	64 ¹ / ₈
OSM	33 ⁵ / ₁₆	42 ³ / ₁₆	46 ³ / ₁₆	48 ¹¹ / ₃₂	51 ¹ / ₁₆	59 ¹ / ₁₆	63 ³ / ₈
8ft. High	Standard						
	8ft. High	Single	USL 1080	USL 1480	USL 1680	+2 USL 1080	+2 USL 1480
8ft. High	Standard						
	8ft. High	Single	USL 1096	USL 1496	USL 1696 *	+2 USL 1096	+2 USL 1496

34" DOOR							
RSO	36 ¹ / ₁₆	44 ¹⁵ / ₁₆	48 ¹⁵ / ₁₆	51 ³ / ₃₂	53 ¹³ / ₁₆	61 ¹³ / ₁₆	66 ¹ / ₈
OSM	35 ⁵ / ₁₆	44 ³ / ₁₆	48 ³ / ₁₆	50 ¹¹ / ₃₂	53 ¹ / ₁₆	61 ¹ / ₁₆	65 ³ / ₈
Standard	Single	+USL 1080	+USL 1480	+USL 1680	+2 USL 1080	+2 USL 1480	+2 USL 1680
8ft. High	Single	+USL 1096	+USL 1496	+USL 1696 *	+2 USL 1096	+2 USL 1496	+2 USL 1696 *

36" DOOR							
RSO	38 ¹ / ₁₆	46 ¹⁵ / ₁₆	50 ¹⁵ / ₁₆	53 ³ / ₃₂	55 ¹³ / ₁₆	63 ¹³ / ₁₆	68 ¹ / ₈
OSM	37 ⁵ / ₁₆	46 ³ / ₁₆	50 ³ / ₁₆	52 ¹¹ / ₃₂	55 ¹ / ₁₆	63 ¹ / ₁₆	67 ³ / ₈
Standard	Single	+USL 1080	+USL 1480	+USL 1680	+2 USL 1080	+2 USL 1480	+2 USL 1680
8ft. High	Single	+USL 1096	+USL 1496	+USL 1696 *	+2 USL 1096	+2 USL 1496	+2 USL 1696 *

Ultraprime Double Doors

32" DOOR				
RSO	67	84 ³ / ₄	92 ³ / ₄	97 ¹ / ₁₆
OSM	66 ¹ / ₄	84	92	96 ⁵ / ₁₆
8ft. High	Standard			
	8ft. High	Double	+2 USL 1080	+2 USL 1480
8ft. High	Standard			
	8ft. High	Double	+2 USL 1096	+2 USL 1496 *

34" DOOR				
RSO	71	88 ³ / ₄	96 ³ / ₄	101 ¹ / ₁₆
OSM	70 ¹ / ₄	88	96	100 ⁵ / ₁₆
Standard	Double	+2 USL 1080	+2 USL 1480	+2 USL 1680
8ft. High	Double	+2 USL 1096	+2 USL 1496	+2 USL 1696 *

36" DOOR				
RSO	75	92 ³ / ₄	100 ³ / ₄	105 ¹ / ₁₆
OSM	74 ¹ / ₄	92	100	104 ⁵ / ₁₆
Standard	Double	+2 USL 1080	+2 USL 1480	+2 USL 1680
8ft. High	Double	+2 USL 1096	+2 USL 1496	+2 USL 1696 *

* 8ft. high doors and side lites are not available in every design. Consult with your Pollard Sales Representative for availability and sizing.


Liberty Masonry Opening
Width - add 1/2" to OSM
Height - add 1/4" to OSM

Ultraprime Masonry Opening
Width - add 2 3/4" to OSM
Height - add 1 3/8" to OSM


When ordering doors, note:
Hinging of door is always determined as viewed from outside.



PERFORMANCE YOU CAN COUNT ON

					ENERGY STAR®		
	1/4 Lite U/SHGC/ER	1/2 Lite U/SHGC/ER	3/4 Lite U/SHGC/ER	Full Lite U/SHGC/ER	Canada 1/4 / 1/2 / 3/4 / Full	U.S.A. 1/4 / 1/2 / 3/4 / Full	
LIBERTY/ULTRAPRIME with Steel Door	Polardor Single/Double without Grills Dual Glazed Standard Low E	0.16/0.07/23	0.19/0.12/22	0.20/0.16/23	0.23/0.22/23	ALL / ALL / ALL / 1,2	ALL / ALL / ALL / ALL
	Polardor Single/Double with Grills Dual Glazed Standard Low E	0.16/0.06/23	0.19/0.11/22	0.20/0.15/23	0.23/0.19/21	ALL / ALL / ALL / 1,2	ALL / ALL / ALL / ALL
	Polardor Single/Double without Grills Dual Glazed SB-10 Upgrade Low E	0.16/0.05/22	0.18/0.10/22	0.20/0.13/22	0.22/0.17/21	ALL / ALL / ALL / 1,2	ALL / ALL / ALL / ALL
	Polardor Single/Double with Grills Dual Glazed SB-10 Upgrade Low E	0.16/0.05/22	0.18/0.08/21	0.20/0.11/20	0.22/0.15/20	ALL / ALL / ALL / 1,2	ALL / ALL / ALL / ALL
	Polardor Single/Double with Decorative Lite Triple Glazed Clear (leaded)	0.18/0.08/21	0.22/0.15/20	0.25/0.20/19	0.28/0.27/20	ALL / 1,2 / 1,2 / 1	ALL / ALL / ALL / N,NC
LIBERTY/ULTRAPRIME with Fiberglass Door	Polardor Single/Double without Grills Dual Glazed Standard Low E	0.18/0.07/21	0.20/0.13/22	0.22/0.17/21	0.24/0.22/22	ALL / ALL / 1,2 / 1,2	ALL / ALL / ALL / ALL
	Polardor Single/Double with Grills Dual Glazed Standard Low E	0.18/0.06/20	0.20/0.11/20	0.22/0.15/20	0.24/0.19/20	ALL / ALL / 1,2 / 1,2	ALL / ALL / ALL / ALL
	Polardor Single/Double without Grills Dual Glazed SB-10 Upgrade Low E	0.18/0.05/20	0.20/0.10/20	0.22/0.13/19	0.24/0.17/19	ALL / ALL / 1,2 / 1,2	ALL / ALL / ALL / ALL
	Polardor Single/Double with Grills Dual Glazed SB-10 Upgrade Low E	0.18/0.05/20	0.20/0.09/19	0.22/0.11/18	0.24/0.15/18	ALL / ALL / 1,2 / 1,2	ALL / ALL / ALL / ALL
	Polardor Single/Double without Grills Triple Glazed Clear (leaded)	0.19/0.08/20	0.22/0.15/20	0.25/0.20/19	0.28/0.27/20	ALL / 1,2 / 1,2 / 1	ALL / ALL / ALL / N,NC
Polardor Single/Double No Glazing	0.15/0.01/21	N/A	N/A	N/A	ALL / N/A / N/A / N/A	ALL / N/A / N/A / N/A	

U – U-Factor. SHGC – Solar Heat Gain Coefficient. ER – Energy Rating.
 The door performance data shown is for reference only and is limited. The actual rating can vary depending on options chosen. Confirm ratings for specific products with your Pollard sales representative.
 Pollard Windows Inc. upholds a continuous product development process and reserves the right to make improvements and/or changes to designs, materials and specifications without notice.

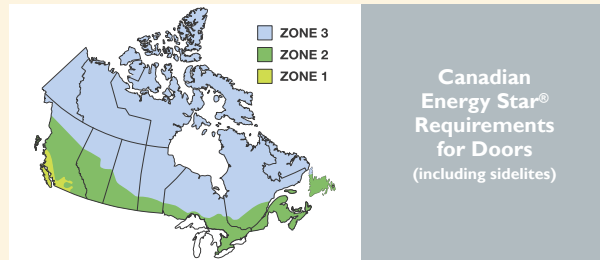

Zone	Heating Degree Day Range	COMPLIANCE PATHS			
		Energy Rating (ER) Minimum ER (unitless) Maximum U-Factor	or	U-Factor Maximum U-Factor Minimum ER (unitless)	
1	≤3500	25	or	1.60 (0.28)	N/A
2	>3500 to <6000	29	or	1.40 (0.25)	N/A
3	≤6000	34	or	1.20 (0.21)	N/A

GLAZING LEVEL	U-FACTOR	SHGC
Opaque	≤0.17	No Rating
≤1/2 Lite	≤0.25	≤0.25
>1/2 Lite, Northern and North-Central	≤0.30	≤0.40
>1/2 Lite, Southern and South-Central	≤0.30	≤0.25

ENERGY STAR is a registered trademark of the U.S. EPA and is administered in Canada by Natural Resources Canada.

ENERGY STAR is a registered trademark of the U.S. Federal Government.

All of our products are designed in our own in-house Research and Development department. Product prototypes are developed and modified as they go through a vigorous testing regime in our own testing machines. Once the product meets our tough standards, products are then sent out for independent testing. We are continuously looking at ways to improve the quality of our products for our customers.

COMBINE BEAUTY, FUNCTION AND SECURITY WITH THESE SPECIALTY DOORS



TERRACE DOORS



ADVANTAGE VISTADOR PATIO DOORS

At Pollard, we have many versatile door types to meet all your needs. Terrace Doors are a terrific choice for patios, decks, porches or walkouts. Sliding patio doors are great for efficient use of space and are available in either all vinyl or vinyl clad wood. And, the FrenchClad Doors always add beauty and warmth of natural wood to any home interior.



LIBERTY VISTADOR PATIO DOORS



FRENCHCLAD WOOD DOORS

Our 300,000 sq.ft. manufacturing plant

HEAD OFFICE

1217 King Road,
P.O. Box 507
Burlington, ON
L7R 3Y3 Canada
Tel: (905) 634-2365
1(800) 263-6616
Fax: (905) 333-3521

US OFFICE

2728 Niagara Falls Blvd.
Niagara Falls, NY
14304 U.S.A.
Tel: (716) 684-0037
1(800) 846-4746
Fax: (716) 695-1918

DISPLAY CENTERS

Burlington

1217 King Road
Burlington, ON L7R 3Y3
Tel: (905) 633-7444
Fax: (905) 633-7666

Toronto

3200 Dufferin Street
Toronto, ON M6A 3B2
Tel: (416) 696-6716
Fax: (416) 696-6718



For a list of Distributors, visit our website at www.pollardwindows.com



Pollard's industry leading warranty

Our commitment to our customers extends to our warranty, considered to be among the best in the business. We offer a solid manufacturer's warranty on parts, a non-prorated warranty on insulated glass units and a non-prorated warranty on all vinyl components. By concentrating on being the best - rather than the biggest - Pollard Windows has earned a reputation for superior quality and durability. Of all our accomplishments, our greatest satisfaction is the loyalty shown to us by many long standing customers. For more information on our warranties please log on to www.pollardwindows.com or contact your Pollard dealer.